


MaXflo HDPE 22.5° ELBOW STANDARD DESIGN

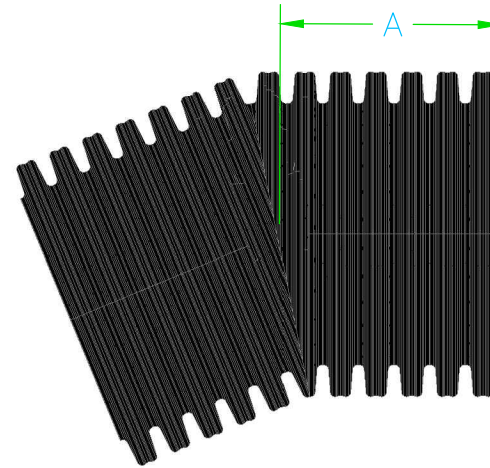

JOINT TYPES:

- EXTERNAL SPLIT COUPLERS - SOIL TIGHT
- BELL X BELL SEAL TIGHT COUPLER - SOIL TIGHT
- BELL X BELL SEAL TIGHT COUPLER W/ STAINLESS STEEL STRAPS - WATERTIGHT
- POLYSEAL MAR MAC COUPLER - WATERTIGHT

*FITTINGS ARE FABRICATED FROM TIMEWELL MAXFLO CORRUGATED HDPE DUAL WALL PIPE CONFORMING TO AASHTO M252 & M294.


SIZE	A	PART #
4"	4.0"	09004-04-22.5-DW
6"	5.0"	09006-06-22.5-DW
8"	8.0"	09008-08-22.5-DW
10"	8.0"	09010-10-22.5-DW
12"	7.5"	09012-12-22.5-DW
15"	10.5"	09015-15-22.5-DW
18"	10.0"	09018-18-22.5-DW
24"	12.0"	09024-24-22.5-DW
30"	15.0"	09030-30-22.5-DW
36"	20.0"	09036-36-22.5-DW
42"	22.5"	09042-42-22.5-DW
48"	25.5"	09048-48-22.5-DW

*FITTING DIMENSIONS ARE FOR REFERENCE ONLY.

REV	DESCRIPTION	BY	DATE	CHK'D				
1	DETAILS AND NOTES	BMH	12/2019					

**MaXflo HDPE 22.5° ELBOW
STANDARD DESIGN**

DRAWING NUMBER:



DRAWN BY: BMH

DATE: 1/10/2012

CHECKED BY: -

SCALE: NTS

SHEET: 1 of 1